



OTHER
CNC TOOLS

Shaft milling cutters

		Ø	diamond length	Fitting	Grit	Spindle speed	Feed rate	Sysnr	Price
		EUR							
	SILVER Universal	20mm	45mm	1/2"G		5.500-6.000 rpm	250-300 mm/min	34205050	92
		23mm	50mm	1/2"G		5.000-5.500 rpm	200-300 mm/min	34209994	92
	YELLOW High speed	23mm	50mm	1/2"G		5.000-5.500 rpm	400-450 mm/min	34019617	92
	WHITE Long life	23mm	50mm	1/2"G		5.000-5.500 rpm	200-300 mm/min	34205520	92
	RED Soft granite	23mm	35mm	1/2"G		5.000-5.500 rpm	200-300 mm/min	34205136	92
		23mm	50mm	1/2"G		5.000-5.500 rpm	200-300 mm/min	34209998	92
		23mm	50mm	Wenzler		5.000-5.500 rpm	200-300 mm/min	886413	88
		23mm	70mm	1/2"G		5.000-5.500 rpm	200-300 mm/min	886058	180
		23mm	85mm	1/2"G		5.000-5.500 rpm	200-300 mm/min	362903	225
	BLUE Hard granite	23mm	35mm	1/2"G		5.500-6.000 rpm	250-300 mm/min	34205138	92
		23mm	50mm	1/2"G		5.000-5.500 rpm	200-300 mm/min	34210001	92
	GOLD Engineered stone	23mm	35mm	1/2"G		5.500-6.000 rpm	250-300 mm/min	34205137	92
		23mm	50mm	1/2"G		5.000-5.500 rpm	200-300 mm/min	34209996	92

Shaft milling cutters


		Ø	diamond length	Fitting	Grit	Spindle speed	Feed rate	Sysnr	Price
		EUR							
	ELECTRO-PLATED Marble	16mm	45mm	1/2"G	D602	5.500-6.000 rpm	250-400 mm/min	462133	130
		22mm	45mm	1/2"G	D602	5.000-5.500 rpm	250-400 mm/min	288043	130
		22mm	65mm	1/2"G	D602	5.000-5.500 rpm	250-400 mm/min	34159508	210
	CUTTING & DRILLING With reinforced base segment	23mm	35mm	1/2"G		5.000-5.500 rpm	200-300 mm/min	400038	125
		23mm	50mm	1/2"G		5.000-5.500 rpm	200-300 mm/min	34210126	130
		23mm	65mm	1/2"G		5.000-5.500 rpm	150-250 mm/min	34222148	190
		23mm	85mm	1/2"G		5.000-5.500 rpm	150-250 mm/min	365852	235
	CERAM Ceramic slabs & Dekton	23mm	25mm	1/2"G	Z3BCU	4.800-5.500 rpm	250-300 mm/min*	34214438	100
		23mm	50mm	1/2"G	Z3BCU	4.800-5.500 rpm	250-300 mm/min*	34012448	115
		16mm	25mm	1/2"G	Ceram5	5.500-6.500 rpm	200-300 mm/min*	34340628	95

* 40% reduction of the speed rate is always suggested when entering and exiting the material.


CERAM

Electroplated seaming wheels

		Ø	diamond length	Fitting	Grit	Spindle speed	Feed rate	Sysnr	Price
		EUR							
		25mm	50mm	1/2"G	D602	POS. 1		34012946	155
		25mm	50mm	1/2"G	D302	POS. 2		34012949	155
		50mm	50mm	1/2"G	D427	POS. 1		34008584	160
		50mm	50mm	1/2"G	D107	POS. 2		34008585	160

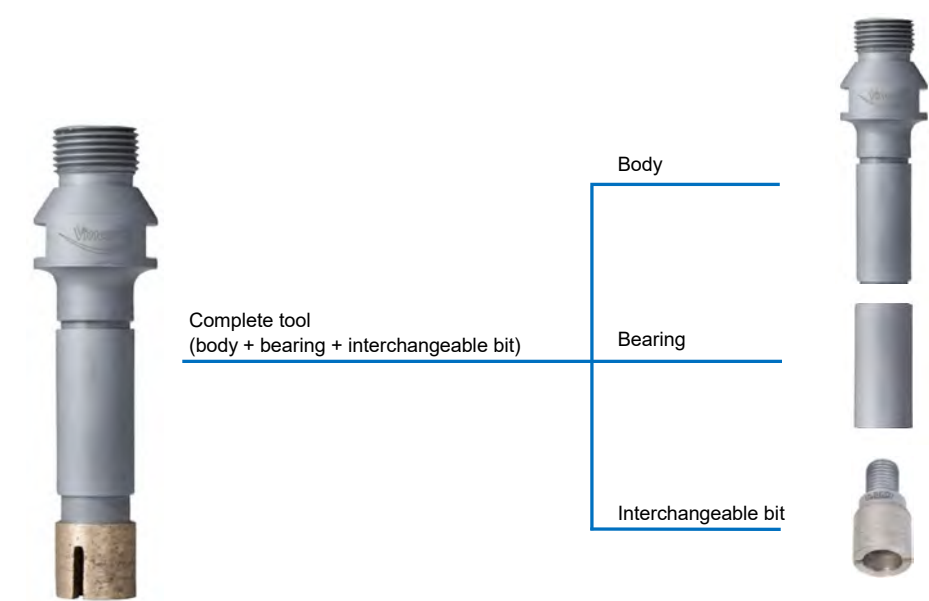

Multiple pass milling cutters

		diamond length	Fitting	Spindle speed	Feed rate	Sysnr	Price
							EUR
Complete tool (body + bearing + interchangeable bit)	for granite	20X20mm	1/2"G	4.000-4.500 rpm	100-300 mm/min*	462030	115
	for marble	20X20mm	1/2"G	4.000-4.500 rpm	100-300 mm/min*	34012129	115

* 40% reduction of the speed rate is always suggested when entering and exiting the material.

		diamond length	Fitting		Sysnr	Price
						EUR
	Replacement bit for granite	20X20mm	M12		34012130	33
	Replacement bit for marble	20X20mm	M12		34012141	33
	Bearing Prolonged - Ø19 mm x 44,5mm				462036	24
	Body	46mm	1/2"G		462035	63
	Prolonged body (no bearing)	118mm	1/2"G		459422	295

Core drills



Segmented core drills for NATURAL and ENGINEERED STONE

Other dimensions available on request

Ø (External)	Segment thickness	Working length	Fitting	Spindle speed	Feed rate	Sysnr	Price
EUR							
35mm	2,2mm	55mm	1/2"G	3.000 rpm	40 mm/min	34159719	48



Core drills with THIN WALL for NATURAL and ENGINEERED STONE

Other dimensions available on request

Ø (External)	Segment thickness	Working length	Fitting	Spindle speed	Feed rate	Sysnr	Price
EUR							
6mm	1mm	55mm	1/2"G	3.000 rpm	25-30 mm/min	34290211	42
8mm	1mm	55mm	1/2"G	3.000 rpm	25-30 mm/min	34289615	45
10mm	1mm	55mm	1/2"G	3.000 rpm	25-30 mm/min	535643	45
11mm	1mm	55mm	1/2"G	3.000 rpm	25-30 mm/min	486211	46
12mm	1mm	55mm	1/2"G	3.000 rpm	25-30 mm/min	486212	47
14mm	1mm	55mm	1/2"G	3.000 rpm	25-30 mm/min	486213	51
15mm	1mm	55mm	1/2"G	3.000 rpm	25-30 mm/min	535644	51
16mm	1mm	55mm	1/2"G	3.000 rpm	25-30 mm/min	512866	52
20mm	1mm	55mm	1/2"G	3.000 rpm	25-30 mm/min	486214	58
21mm	1mm	55mm	1/2"G	3.000 rpm	25-30 mm/min	34184687	61
22mm	1mm	55mm	1/2"G	2.500 rpm	27-35 mm/min	512868	61
23mm	1mm	55mm	1/2"G	2.500 rpm	27-35 mm/min	535647	66
25mm	1mm	55mm	1/2"G	2.500 rpm	27-35 mm/min	462441	70
27mm	1mm	55mm	1/2"G	2.500 rpm	27-35 mm/min	535648	73
28mm	1mm	55mm	1/2"G	2.500 rpm	27-35 mm/min	535649	73
30mm	1mm	55mm	1/2"G	2.000 rpm	27-35 mm/min	462443	78
32mm	1mm	55mm	1/2"G	2.000 rpm	27-35 mm/min	462444	80
35mm	1mm	55mm	1/2"G	2.000 rpm	27-35 mm/min	462445	87
36mm	1mm	55mm	1/2"G	1.200 rpm	27-35 mm/min	497946	88
37mm	1mm	55mm	1/2"G	1.200 rpm	27-35 mm/min	497948	92
38mm	1mm	55mm	1/2"G	1.200 rpm	27-35 mm/min	462446	93
40mm	1mm	55mm	1/2"G	1.200 rpm	27-35 mm/min	462448	99
45mm	1mm	55mm	1/2"G	1.200 rpm	27-35 mm/min	512873	105
50mm	1mm	55mm	1/2"G	1.200 rpm	27-35 mm/min	641923	115
51mm	1mm	55mm	1/2"G	1.200 rpm	27-35 mm/min	34011881	120
54mm	1mm	55mm	1/2"G	1.200 rpm	27-35 mm/min	34010351	125
60mm	1mm	55mm	1/2"G	800 rpm	25-30 mm/min	512875	145
62mm	1mm	55mm	1/2"G	800 rpm	25-30 mm/min	34322689	150
68mm	1mm	55mm	1/2"G	800 rpm	25-30 mm/min	535863	165
80mm	1mm	55mm	1/2"G	800 rpm	25-30 mm/min	34261970	190
82mm	1mm	55mm	1/2"G	800 rpm	25-30 mm/min	34322690	190
100mm	1mm	55mm	1/2"G	800 rpm	25-30 mm/min	34185025	235



Electroplated core drills for MARBLE and LIMESTONES

Other dimensions available on request

Ø (External)	Grit	Working length	Fitting	Spindle speed	Feed rate	Sysnr	Price
							EUR
25mm	D602	100mm	1/2"G	3.000 rpm	25-30 mm/min	34011968	105
30mm	D602	100mm	1/2"G	2.000 rpm	27-35 mm/min	34011969	120
35mm	D602	100mm	1/2"G	2.000 rpm	27-35 mm/min	479553	130
60mm	D602	100mm	1/2"G	800 rpm	25-30 mm/min	682242	175



Core drills for TECHNICAL CERAMIC SLABS

Other dimensions available on request



Ø (External)	Segment thickness	Working length	Fitting	Spindle speed	Feed rate	Sysnr	Price
							EUR
10mm	1mm	50mm	1/2"G	3.000 rpm	25-30 mm/min	34336069	72
18mm	1mm	50mm	1/2"G	3.000 rpm	25-30 mm/min	34299716	84
20mm	1mm	50mm	1/2"G	3.000 rpm	25-30 mm/min	34311230	84
22mm	1mm	50mm	1/2"G	2.500 rpm	27-35 mm/min	34180357	90
30mm	1mm	50mm	1/2"G	2.000 rpm	27-35 mm/min	34279478	100
32mm	1mm	50mm	1/2"G	2.000 rpm	27-35 mm/min	34180358	105
35mm	1mm	50mm	1/2"G	2.000 rpm	27-35 mm/min	34339989	105
60mm	1mm	50mm	1/2"G	800 rpm	25-30 mm/min	34327355	175
65mm	1mm	50mm	1/2"G	800 rpm	25-30 mm/min	34327356	190
68mm	1mm	50mm	1/2"G	800 rpm	25-30 mm/min	34311281	190

Blind hole drills



Blind core drills for NATURAL and ENGINEERED STONE

Other dimensions available on request

Ø (External)	Working length	Fitting	Spindle speed	Feed rate	Sysnr	Price
EUR						
5mm	55mm	1/2"G	6.200 rpm	15 mm/min	631794	40
6mm	55mm	1/2"G	6.200 rpm	15 mm/min	403074	42
7mm	55mm	1/2"G	5.800 rpm	20 mm/min	34005890	44
8mm	55mm	1/2"G	5.800 rpm	20 mm/min	403075	44
10mm	55mm	1/2"G	5.800 rpm	20 mm/min	526865	49
11mm	55mm	1/2"G	5.500 rpm	15 mm/min	486210	54
12mm	55mm	1/2"G	5.500 rpm	15 mm/min	34013420	54
14mm	55mm	1/2"G	5.500 rpm	15 mm/min	484102	65
5mm	55mm	10 mm diameter shaft	6.200 rpm	15 mm/min	557355	24
6mm	55mm	10 mm diameter shaft	6.200 rpm	15 mm/min	34013421	26
7mm	55mm	10 mm diameter shaft	5.800 rpm	20 mm/min	34013422	27
8mm	55mm	10 mm diameter shaft	5.800 rpm	20 mm/min	487268	28
10mm	55mm	10 mm diameter shaft	5.800 rpm	20 mm/min	526863	35
11mm	55mm	10 mm diameter shaft	5.500 rpm	15 mm/min	493583	36
12mm	55mm	10 mm diameter shaft	5.500 rpm	15 mm/min	526864	44
14mm	55mm	10 mm diameter shaft	5.500 rpm	15 mm/min	522720	52

High speed Calibrating / Stubbing wheels

Improved Productivity:
Specifically designed bond
means high feed speeds



Easy turn over: Brass body does not rust and allows wheel to be turned over easily. Versions complete with 1/2" Gas attachments have fitting and screws in high grade stainless steel.

Diameter	Height	Fitting	Spindle speed	Feed rate	Stock removal	Sysnr	Price
EUR							
		Ø 50mm	Stubbing wheels for GRANITE and ENGINEERED STONE				
50mm	30mm	Bore: 14mm (3 + 3 holes)	6.000 rpm	400 mm/min	1-3 mm		
Complete tool						34363399	190
Diamond wheel only						34363397	150
Only 1/2"G fitting with screws						34391409	53
		Ø 90mm	Stubbing wheels for GRANITE and ENGINEERED STONE				
90mm	30mm	Bore: 50mm (3 + 3 holes)	5.000 rpm	400 mm/min	1-3 mm		
Complete tool						34378604	255
Diamond wheel only						34357681	200
Only 1/2"G fitting with screws						81014975	63
		Ø 90mm	Stubbing wheels for GRANITE and ENGINEERED STONE				
Very long life: Class leading 10mm thick diamond band means optimum life.							
90mm	30mm	Bore: 20mm (4 + 4 holes)	5.000 rpm	400 mm/min	1-3 mm		
Complete tool						34058413	275
Diamond wheel only						34052986	225
Only 1/2"G fitting with screws						81014978	66
		Ø 100mm	Stubbing wheels for GRANITE and ENGINEERED STONE				
Very long life: Class leading 10mm thick diamond band means optimum life.							
100mm	30mm	Bore: 50mm (3 + 3 holes)	5.000 rpm	400 mm/min	2-4 mm		
Complete tool						34228532	310
Diamond wheel only						34228531	260
Only 1/2"G fitting with screws						81014975	63

**BEST
SELLER**

Diameter	Height	Fitting	Spindle speed	Feed rate	Tiles automatic	Sysnr	Price
							
		Ø 90mm	Stubbing wheels for MARBLE and CALCAREOUS AGGLOMERATE				
90mm	30mm	Bore: 50mm (3 + 3 holes)	5.000 rpm	400 mm/min	1-3 mm		
Complete tool						-	275
Diamond wheel only						34357680	225
Only 1/2"G fitting with screws						81014975	63
							
		Ø 50mm	Stubbing wheels for TECHNICAL CERAMICS and DEKTON				
50mm	30mm	Bore: 14mm (3 + 3 holes)	6.000 rpm	400 mm/min	1-3 mm		
Complete tool						34398390	190
Diamond wheel only						34376163	150
Only 1/2"G fitting with screws						34391409	53



Calibrating / Stubbing wheels for GRANITE and ENGINEERED STONE

Diameter	Segment height	Fitting	Spindle speed	Feed rate	Stock removal	Sysnr	Price
EUR							
							
Ø 50mm							
50mm	25mm	2 holes	5.000-6.000 rpm	100-200 mm/min	1-3 mm		
Complete tool						897213	235
Diamond wheel only						242579	205
Only 1/2"G fitting with screws						81014977	63
							
Ø 80mm							
80mm	20mm	Bore: 20mm 4 + 4 holes	4.000-5.000 rpm	150-300 mm/min	2-4 mm		
Complete tool - 1/2" G fitting						479554	260
Complete tool - 35mm bore fitting						762197	260
Diamond wheel only						762199	210
Only 1/2"G fitting with screws						81014978	66
35mm bore fitting , only						301418	66
							
Ø 85mm							
85mm	20mm	Bore: 50mm 3 + 3 holes	4.000-5.000 rpm	150-300 mm/min	2-4 mm		
Complete tool						34011965	260
Diamond wheel only						67966	210
Only 1/2"G fitting with screws						81014979	66
							
Ø 100mm							
100mm	20mm	Bore: 20mm 4 + 4 holes	4.000-5.000 rpm	200-400 mm/min	2-4 mm		
Complete tool						564862	345
Diamond wheel only						34011941	310
Only 1/2"G fitting with screws						81014978	66
							
Ø 20mm - Ø 30mm - Ø 35mm							
20mm	10mm	1/2"G	4.000-5.000 rpm	200-400 mm/min	1-3 mm	534995	135
30mm	18mm	1/2"G	4.000-5.000 rpm	200-400 mm/min	1-3 mm	638058	140
35mm	18mm	1/2"G	4.000-5.000 rpm	200-400 mm/min	1-3 mm	34013269	145

Calibrating / Stubbing wheels for MARBLE and LIMESTONES

Diameter	Segment height	Fitting	Spindle speed	Feed rate	Stock removal	Sysnr	Price
							EUR



Ø 80mm

80mm	25mm	Bore: 20mm 4 + 4 holes	5.000-6.000 rpm	100-200 mm/min	1-3 mm		
------	------	---------------------------	-----------------	----------------	--------	--	--

Complete tool	462189	295
Diamond wheel only	462190	235
Only 1/2"G fitting with screws	81014978	66



Ø 85mm

85mm	20mm	Bore: 50mm 3 + 3 holes	4.000-5.000 rpm	400-600 mm/min	3-5 mm		
------	------	---------------------------	-----------------	----------------	--------	--	--

Complete tool	462191	285
Diamond wheel only	462192	220
Only 1/2"G fitting with screws	81014979	66

Stubbing wheels for TECHNICAL CERAMICS



Ø 12,5mm

Small radius tool for flash fitting top and incremental cutting

CERAM

Diameter	Working length	Fitting	Spindle speed	Feed rate	Stock removal	Sysnr	Price
							EUR
8mm	12mm	1/2"G	5.500 rpm	100-200 mm/min	0,5 mm	34474832	79
12,5mm	12mm	1/2"G	4.500 rpm	150-300 mm/min	0,5 mm	34408605	79
12,5mm	20mm	1/2"G	4.500 rpm	150-300 mm/min	0,5 mm	34476406	84

Recessed drainboard wheels for GRANITE and ENGINEERED STONE 45° inclination

Positions								
1	2	3	4	5	6	7	8	9
Stubbing	Recessed drainboard wheels		Recessed drainboard polishing wheels					
High speed*	Inclined top processing		Flat polishing					
Standard*			Inclined edge polishing					

* First position is any stubbing wheel

Recessed drainboard wheels

	Diameter	Grit	Fitting	Spindle speed	Feed rate	Stock removal	Sysnr	Price
								EUR



100mm	Medium	1/2"G	3.800-4.500 rpm	200-400 mm/min	0,3-0,4 mm	189952	350
100mm	Fine	1/2"G	3.800-4.500 rpm	200-400 mm/min	0,2 mm	189954	350

Recessed drainboard polishing wheels

	Diameter	Grit	Spindle speed	Feed rate	Sysnr	Sysnr	Price
							EUR
	Flat polishing				Snail fitting	Magnetic fitting	
	100mm	50	1.200 rpm	4.000 mm/min		34012971	175
	100mm	100	1.200 rpm	4.000 mm/min		34012972	175
	100mm	200	1.200 rpm	4.000 mm/min	34393728	34012905	175
	100mm	500	1.200 rpm	4.000 mm/min	34393729	34012906	175
	100mm	1000	1.200 rpm	4.000 mm/min	34393730	34012907	175
	100mm	2000	1.200 rpm	4.000 mm/min	34039243	34012908	175
	100mm	3000	1.200 rpm	4.000 mm/min	34393751	34012909	175
	100mm	dark buff	1.000-1.200 rpm	3.500 mm/min	475638	394184	175
	45° inclination					Bore 35mm	
	100mm	500	1.000-1.200 rpm	3.500 mm/min		400033	235
	100mm	1000	1.000-1.200 rpm	3.500 mm/min		400035	235
	100mm	2000	1.000-1.200 rpm	3.500 mm/min		400036	235

Drainboard grooving routers and wheels for GRANITE and ENGINEERED STONE



Single pass grooving routers

Position	Diameter	Radius	Length	Fitting	Grit	Spindle speed	Feed rate	Sysnr	Price EUR
1	5 mm	2,5 mm	15 mm	1/2" G	M9	4.000-6.000 rpm	200-500 mm/min	34338467	150
1	6 mm	3 mm	15 mm	1/2" G	M9	4.000-6.000 rpm	200-500 mm/min	364670	150
1	10 mm	5 mm	10 mm	1/2" G	M9	4.000-6.000 rpm	200-500 mm/min	298086	145
1	12 mm	6 mm	20 mm	1/2" G	M9	4.000-6.000 rpm	200-500 mm/min	762562	155
1	15 mm	7,5 mm	20 mm	1/2" G	M9	4.000-6.000 rpm	200-500 mm/min	298087	165
1	20 mm	10 mm	20 mm	1/2" G	M9	4.000-6.000 rpm	200-500 mm/min	298088	175



Multiple pass grooving router sets

Set of wheels for 12mm

Position	Diameter	Radius	Length	Fitting	Grit	Spindle speed	Feed rate	Sysnr	Price EUR
1	10 mm	5 mm	20mm	1/2" G	M9	4.000-6.000 rpm	200-500 mm/min	298086	145
2	11 mm	5,5 mm	20mm	1/2" G	M12	4.000-6.000 rpm	200-500 mm/min	34041173	145
3	11,6 mm	5,8 mm	20mm	1/2" G	M19	4.000-6.000 rpm	200-500 mm/min	34041174	145
4	12 mm	6 mm	20mm	1/2" G	M20	4.000-6.000 rpm	200-500 mm/min	34041175	145

Set of wheels for 15mm

Position	Diameter	Radius	Length	Fitting	Grit	Spindle speed	Feed rate	Sysnr	Price EUR
1	12mm	6mm	20mm	1/2" G	M9	4.000-6.000 rpm	200-500 mm/min	762562	155
2	14mm	7mm	20mm	1/2" G	M12	4.000-6.000 rpm	200-500 mm/min	762563	155
3	14,6mm	7,3mm	20mm	1/2" G	M19	4.000-6.000 rpm	200-500 mm/min	762564	155
4	15mm	7,5mm	20mm	1/2" G	M20	4.000-6.000 rpm	200-500 mm/min	762565	155

Set of wheels for 20mm

Position	Diameter	Radius	Length	Fitting	Grit	Spindle speed	Feed rate	Sysnr	Price EUR
1	17mm	8,5mm	20mm	1/2" G	M9	4.000-6.000 rpm	200-500 mm/min	762566	165
2	19mm	9,5mm	20mm	1/2" G	M12	4.000-6.000 rpm	200-500 mm/min	762567	165
3	19,6mm	9,8mm	20mm	1/2" G	M19	4.000-6.000 rpm	200-500 mm/min	762568	165
4	20mm	10mm	20mm	1/2" G	M20	4.000-6.000 rpm	200-500 mm/min	762569	165

Drainboard grooving routers and wheels for GRANITE and ENGINEERED STONE



	Diameter	Radius	Bore	Grit	Spindle speed	Feed rate	Sysnr	Price
EUR								
Grooving wheel	140mm	5mm	30mm	Fine	2.500 rpm	500 mm/min	34228533	420
Abrasive polishing wheel	140mm	5mm	30mm	400	1.500 rpm	500 mm/min	34238113	135
Abrasive polishing wheel	140mm	5mm	30mm	1000	1.500 rpm	500 mm/min	34238115	135
Grooving wheel	150mm	5mm	30mm	Fine	2.500 rpm	500 mm/min	486176	445
Abrasive polishing wheel	150mm	5mm	30mm	400	1.500 rpm	500 mm/min	362752	140
Abrasive polishing wheel	150mm	5mm	30mm	1000	1.500 rpm	500 mm/min	491727	140
Grooving wheel	150mm	5mm	22mm	Fine	2.500 rpm	500 mm/min	34012064	445
Abrasive polishing wheel	180mm	5mm	22mm	400	1.500 rpm	500 mm/min	342092	140

Writing bits

	Fitting	Spindle speed	Feed rate	Sysnr	Price
EUR					



Mushroom	Sintered bits	Ø 15 x 13 mm R6	6mm	6.000 rpm	100-200 mm/min	472215	39
Cylinder	Sintered bits	Ø 15 x 13 mm	6mm	6.000 rpm	100-200 mm/min	472213	51
Conical	Sintered bits	Ø 15 - 13 mm	6mm	6.000 rpm	100-200 mm/min	472216	34
Trapezoidal	Sintered bits	Ø 15 x 13 mm	6mm	6.000 rpm	100-200 mm/min	472214	39
Cylinder	Sintered bits	Ø 10 - 30 mm	6mm	6.000 rpm	100-200 mm/min	472217	51



20 piece set (selection of shapes)

6mm	6.000 rpm	100-300 mm/min	34017793	120
-----	-----------	----------------	----------	-----

Writing bits

	Fitting	Spindle speed	Feed rate	Sysnr	Price
EUR					



Universal

Widia

Bas-relief bits - Universal	1/2"G	7.000 rpm	100 mm/min	437424	200
Bas-relief bits - Widia, radius= 5mm with water flow	1/2"G	7.000 rpm	100 mm/min	588405	135
Bas-relief bits - Widia, radius= 3mm with water flow	1/2"G	7.000 rpm	100 mm/min	437428	135

Widia - angle 60°	10mm	6.000 rpm	100 - 200 mm/min	650227	31
Widia - angle 90°	10mm	6.000 rpm	100 - 200 mm/min	569290	31
PCD - angle 60°	10mm	6.000 rpm	100 - 200 mm/min	361731	210
PCD - angle 90°	10mm	6.000 rpm	100 - 200 mm/min	285638	210

Adapters

	Sysnr	Price
--	-------	-------



Basic with grub screw (D6mm - 1/2" G)	34008623	63
Basic with grub screw (D10mm - 1/2" G)	34008608	63



Professional with 6mm and 10mm collets	333774	210
--	--------	------------

Abrasive sticks



		Grit	Sysnr	Price EUR
Abrasive sticks	200X50X10	150	34217115	4,50
Abrasive sticks	150X25X15	150	34217113	4,50
Abrasive sticks	150X20X10	300	34217114	4,50

Adapters and fittings



531608



301421



377591



301422

	Sysnr	Price EUR
Bore reduction 35mm / 30mm	531608	63
Bore reduction 35mm / 22mm (Bavelloni)	301421	38
Adapter 1/2"G Thickness -20mm	377591	66
Adapter / Washer Thickness 5mm	301422	8

